



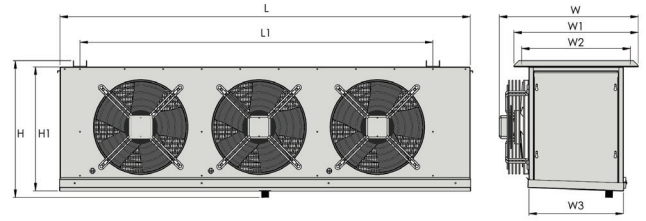

DIŞ ÜNİTE (KONDENSER) ÖLÇÜLERİ / OUTDOOR UNIT (CONDENSER) DIMENSIONS								İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLERİ / INDOOR UNIT (EVAPORATOR) DIMENSIONS							
L	L1	H	H1	W	W1	W2	W3	L	L1	H	H1	W	W1	W2	W3
1700	----	1333	1247	700	690	750	823	2300	1980	791	728	621	555	492	441

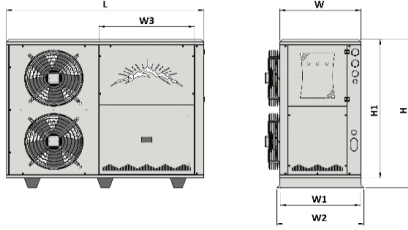


DIŞ ÜNİTE / OUTDOOR UNIT	= 345 kg	İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm	= 95 kg
--------------------------	----------	--	---------

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	EWEREST 10-44	MARKA / BRAND	DORİN	MODEL / MODEL	TEA50 135 6
ADET / QUANTITY	1	MODEL / MODEL	H 1201 CC	ADET / QUANTITY	1
FAN ADET / NUMBER OF FANS	2	GÜÇ / POWER	12 HP	FAN ADET / NUMBER OF FANS	3
FAN ÇAPI / FAN DIAMETER (mm)	500	TİPİ / TYPE	YARI HERMETİK	FAN ÇAPI / FAN DIAMETER (mm)	500
KAPASİTE / CAPACITY (kW)	44	NOMİNAL AKIM / NOMINAL CURRENT	-----	KAPASİTE / CAPACITY (kW)	23.42
YÜZEY ALANI / SURFACE AREA (m ²)	135	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m ²)	5/8- 1 3/8	YÜZEY ALANI / SURFACE AREA (m ²)	72.44

ÜRÜN / PRODUCT	ECO	PLS
GAZ DEPOSU / GAS RECEIVER	✓	✓
YAĞ AYIRICI / OIL SEPARATOR	✗	✗
LİKİT TUTUCU / LIQUID RECEIVER	✗	✗
MANOMETRE / PRESSURE GAUGE	✗	✓
Y.B. SWİTÇİ / HIGH PRESSURE SWITCH	✓	✗
KOMBİNE / COMBINATION UNIT	✗	✓
GÖZELTME CAMI / SIGHT GLASS	✓	✓
SELENOİD / SOLENOID VALVE	✗	✓
TİTREŞİM / VIBRATION ISOLATOR	✓	✓
DRAYER / DRYER	✓	✓
DİJİTAL / DIGITAL	✓	✓
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓
KAPİLER / CAPILLARY TUBE	✗	✓

AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR.
THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.

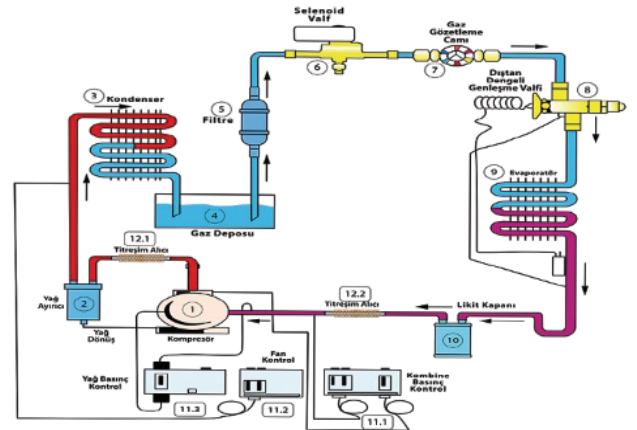

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	0/+45	0/+50	-10/+45	-10/+50	0/+45	0/+50	-10/+45	-10/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	32.86	29.79	22.44	20.25	32.43	30.02	21.29	19.56
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	11.33	11.90	9.65	9.94	10.29	10.89	8.68	8.96
COP / COP (w/w)	2.90	2.50	2.33	2.04	3.15	2.76	2.45	2.18