





DIŞ ÜNİTE (KONDENSER) ÖLÇÜLERİ / OUTDOOR UNIT (CONDENSER) DIMENSIONS

L	L1	H	H1	W	W1	W2	W3
3000	----	1349	1262	800	784	844	846

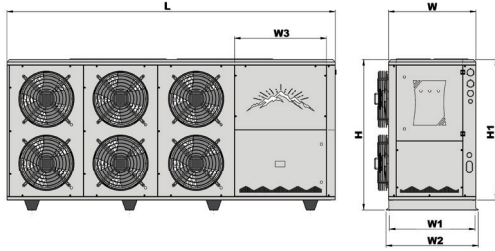

İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLERİ / INDOOR UNIT (EVAPORATOR) DIMENSIONS

L	L1	H	H1	W	W1	W2	W3
2300	1980	791	728	621	555	492	441

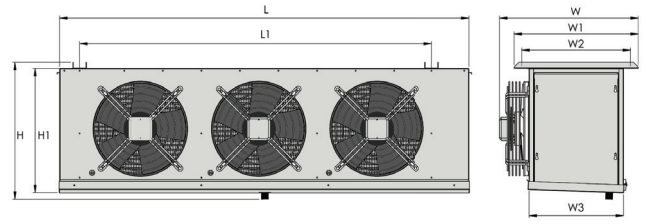

DIŞ ÜNİTE / OUTDOOR UNIT = 568 KG


İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm = 125 KG

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	EWEREST 30-100	MARKA / BRAND	DORİN	MODEL / MODEL	TEA50 135 6
ADET / QUANTITY	1	MODEL / MODEL	H 3200 CC	ADET / QUANTITY	2
FAN ADET / NUMBER OF FANS	6	GÜÇ / POWER	32 HP	FAN ADET / NUMBER OF FANS	3
FAN ÇAPI / FAN DIAMETER (mm)	500	TİPİ / TYPE	YARIHERMETİK	FAN ÇAPI / FAN DIAMETER (mm)	500
KAPASİTE / CAPACITY (kW)	100	NOMİNAL AKIM / NOMINAL CURRENT	-----	KAPASİTE / CAPACITY (kW)	23.42
YÜZEY ALANI / SURFACE AREA (m ²)	257	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m ²)	7/8-2 1/8	YÜZEY ALANI / SURFACE AREA (m ²)	72.44

ÜRÜN / PRODUCT	ECO	PLS
GAZ DEPOSU / GAS RECEIVER	✓	✓
YAĞ AYIRICI / OIL SEPARATOR	✗	✗
LİKİT TUTUCU / LIQUID RECEIVER	✗	✗
MANOMETRE / PRESSURE GAUGE	✗	✓
Y.B. SWITCHİ / HIGH PRESSURE SWITCH	✓	✗
KOMBİNE / COMBINATION UNIT	✗	✓
GÖZELTME CAMI / SIGHT GLASS	✓	✓
SELENOİD / SOLENOID VALVE	✗	✓
TİTREŞİM / VIBRATION ISOLATOR	✓	✓
DRAYER / DRYER	✓	✓
DİJİTAL / DIGITAL	✓	✓
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓
KAPİLER / CAPILLARY TUBE	✗	✓

AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR.
THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.

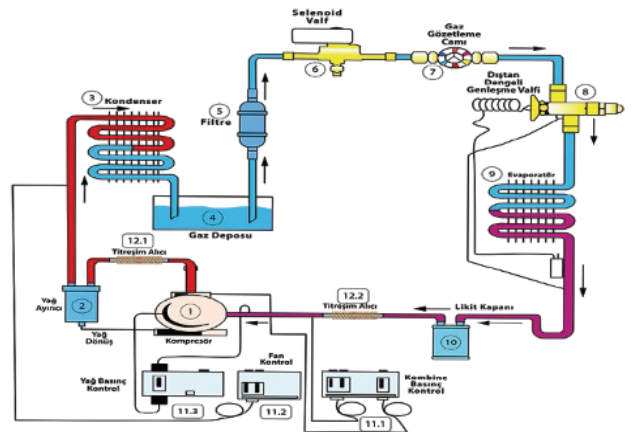

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	0/+45	0/+50	-10/+45	-10/+50	0/+45	0/+50	-10/+45	-10/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	69.48	62.25	47.24	42.26	70.39	65.03	46.33	42.50
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	23.63	25.18	20.04	20.91	21.78	23.10	18.90	19.72
COP / COP (w/w)	2.94	2.47	2.36	2.02	3.23	2.82	2.45	2.15