







DIŞ ÜNİTE (KONDENSER) ÖLÇÜLER / OUTDOOR UNIT (CONDENSER) DIMENSIONS								İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLER / INDOOR UNIT (EVAPORATOR) DIMENSIONS							
L	L1	H	H1	W	W1	W2	W3	L	L1	H	H1	W	W1	W2	W3
1150	0	656	626	400	420	435	512	1110	836	515	482	463	405	351	196




DIŞ ÜNİTE / OUTDOOR UNIT	= 75 KG	İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm	= 25 KG
--------------------------	---------	--	---------

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	SNOWBOX 200	MARKA / BRAND	COPELAND	MODEL / MODEL	TEA30 124 6
ADET / QUANTITY	1	MODEL / MODEL	ZB15KCE TFD	ADET / QUANTITY	1
FAN ADET / NUMBER OF FANS	1	GÜÇ / POWER	2 HP	FAN ADET / NUMBER OF FANS	2
FAN ÇAPI / FAN DIAMETER (mm)	400	TİPİ / TYPE	HERMETİK	FAN ÇAPI / FAN DIAMETER (mm)	300
KAPASİTE / CAPACITY (kW)	9.5	NOMİNAL AKIM / NOMINAL CURRENT		KAPASİTE / CAPACITY (kW)	3.37
YÜZEY ALANI / SURFACE AREA (m²)	30	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m²)	3/8-7/8	YÜZEY ALANI / SURFACE AREA (m²)	14,67

ÜRÜN / PRODUCT	ECO	PLS	AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR. THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.
GAZ DEPOSU / GAS RECEIVER	✓	✓	
YAĞ AYIRICI / OIL SEPARATOR	✗	✗	
LİKİT TUTUCU / LIQUID RECEIVER	✗	✗	
MANOMETRE / PRESSURE GAUGE	✗	✓	
Y.B. SWITCHİ / HIGH PRESSURE SWITCH	✓	✗	
KOMBİNE / COMBINATION UNIT	✗	✓	
GÖZELTME CAMI / SIGHT GLASS	✓	✓	
SELENOİD / SOLENOID VALVE	✗	✓	
TİTREŞİM / VIBRATION ISOLATOR	✓	✓	
DRAYER / DRYER	✓	✓	
DİJİTAL / DIGITAL	✓	✓	
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓	
KAPİLER / CAPILLARY TUBE	✗	✓	

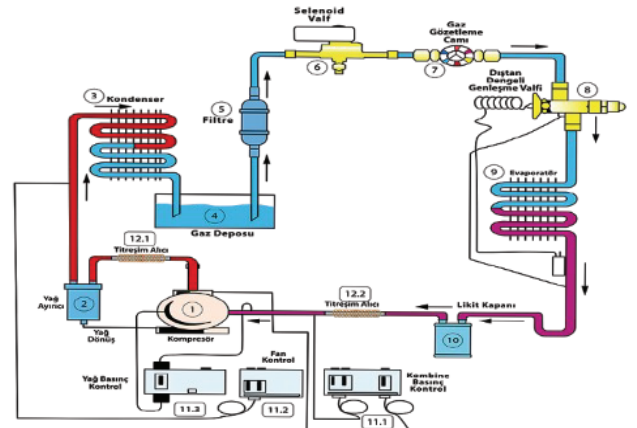

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	0/+45	0/+50	-10/+45	-10/+50	0/+45	0/+50	-10/+45	-10/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	5.26	4.74	3.48	3.08	5.52	5.07	3.61	3.27
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	1.72	1.98	1.83	2.11	1.72	1.96	1.78	2.05
COP / COP (w/w)	3.04	2.40	1.90	1.46	3.22	2.58	2.04	1.60