



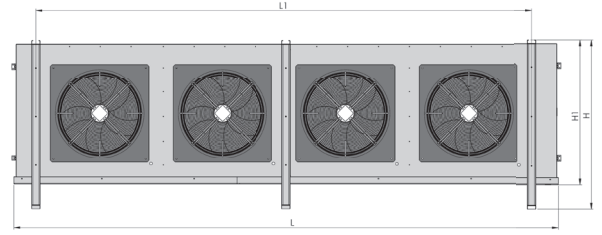

DIŞ ÜNİTE (KONDENSER) ÖLÇÜLERİ / OUTDOOR UNIT (CONDENSER) DIMENSIONS								İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLERİ / INDOOR UNIT (EVAPORATOR) DIMENSIONS							
L	L1	H	H1	W	W1	W2	W3	L	L1	H	H1	W	W1	W2	W3
3600	0	1796	1709	1090	1108	1168	799	4431	4030	1335	1165	1050	1015	955	746

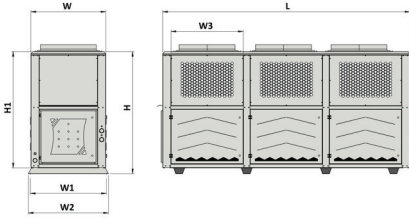

DIŞ ÜNİTE / OUTDOOR UNIT = 745 kg


İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm = 590 kg

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	SNKVL 181	MARKA / BRAND	DORİN	MODEL / MODEL	TFF63 148 10
ADET / QUANTITY	1	MODEL / MODEL	2S-H6500	ADET / QUANTITY	1
FAN ADET / NUMBER OF FANS	3	GÜÇ / POWER	65 HP	FAN ADET / NUMBER OF FANS	4
FAN ÇAPI / FAN DIAMETER (mm)	800	TİPİ / TYPE	ÇİFT KADEME	FAN ÇAPI / FAN DIAMETER (mm)	630
KAPASİTE / CAPACITY (kW)	181	NOMİNAL AKIM / NOMINAL CURRENT		KAPASİTE / CAPACITY (kW)	39.48
YÜZEY ALANI / SURFACE AREA (m ²)	487	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m ²)	1 1/8 - 2 5/8	YÜZEY ALANI / SURFACE AREA (m ²)	318,27

ÜRÜN / PRODUCT	ECO	PLS
GAZ DEPOSU / GAS RECEIVER	✓	✓
YAĞ AYIRICI / OIL SEPARATOR	✓	✓
LİKİT TUTUCU / LIQUID RECEIVER	✓	✓
MANOMETRE / PRESSURE GAUGE	✗	✓
Y.B. SWITCHİ / HIGH PRESSURE SWITCH	✓	✗
KOMBİNE / COMBINATION UNIT	✗	✓
GÖZELTME CAMI / SIGHT GLASS	✓	✓
SELENOİD / SOLENOID VALVE	✗	✓
TİTREŞİM / VIBRATION ISOLATOR	✓	✓
DRAYER / DRYER	✓	✓
DİJİTAL / DIGITAL	✓	✓
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓
KAPİLER / CAPILLARY TUBE	✗	✓

AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR.
THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.

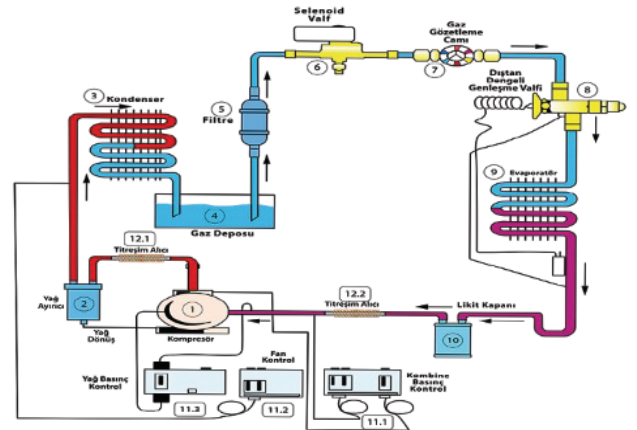

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	-40/+40	-40/+50	-45/+40	-45/+50	-40/+40	-40/+50	-45/+40	-45/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	41.92	39.60	33.25	31.56	33.88	32.09	26.30	25.04
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	32.00	34.10	28.31	30.03	26.89	28.76	23.41	24.93
COP / COP (w/w)	1.31	1.16	1.17	1.05	1.26	1.12	1.12	1.00