





DIŞ ÜNİTE (KONDENSER) ÖLÇÜLERİ / OUTDOOR UNIT (CONDENSER) DIMENSIONS

L	L1	H	H1	W	W1	W2	W3
1700	-----	1333	1247	700	690	750	823

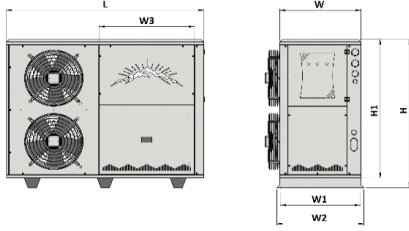

İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLERİ / INDOOR UNIT (EVAPORATOR) DIMENSIONS

L	L1	H	H1	W	W1	W2	W3
1850	1530	871	808	621	555	492	441

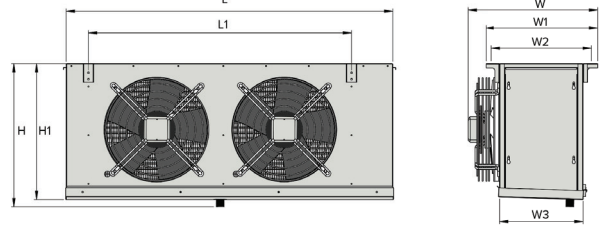

DIŞ ÜNİTE / OUTDOOR UNIT = 290 kg


İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm = 95 kg

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	EWEREST 10-44	MARKA / BRAND	DORİN	MODEL / MODEL	TEA50 125 6 T2
ADET / QUANTITY	1	MODEL / MODEL	H 1002 CC	ADET / QUANTITY	1
FAN ADET / NUMBER OF FANS	2	GÜÇ / POWER	10 HP	FAN ADET / NUMBER OF FANS	2
FAN ÇAPI / FAN DIAMETER (mm)	500	TİPİ / TYPE	YARIHERMETİK	FAN ÇAPI / FAN DIAMETER (mm)	500
KAPASİTE / CAPACITY (kW)	44	NOMİNAL AKIM / NOMINAL CURRENT	-----	KAPASİTE / CAPACITY (kW)	19.205
YÜZEY ALANI / SURFACE AREA (m ²)	135	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m ²)	5/8-1 3/8	YÜZEY ALANI / SURFACE AREA (m ²)	62.69

ÜRÜN / PRODUCT	ECO	PLS
GAZ DEPOSU / GAS RECEIVER	✓	✓
YAĞ AYIRICI / OIL SEPARATOR	✗	✗
LİKİT TUTUCU / LIQUID RECEIVER	✗	✗
MANOMETRE / PRESSURE GAUGE	✗	✓
Y.B. SWITCHİ / HIGH PRESSURE SWITCH	✓	✗
KOMBİNE / COMBINATION UNIT	✗	✓
GÖZELTME CAMI / SIGHT GLASS	✓	✓
SELENOİD / SOLENOID VALVE	✗	✓
TİTREŞİM / VIBRATION ISOLATOR	✓	✓
DRAYER / DRYER	✓	✓
DİJİTAL / DIGITAL	✓	✓
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓
KAPİLER / CAPILLARY TUBE	✗	✓

AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR.
THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.

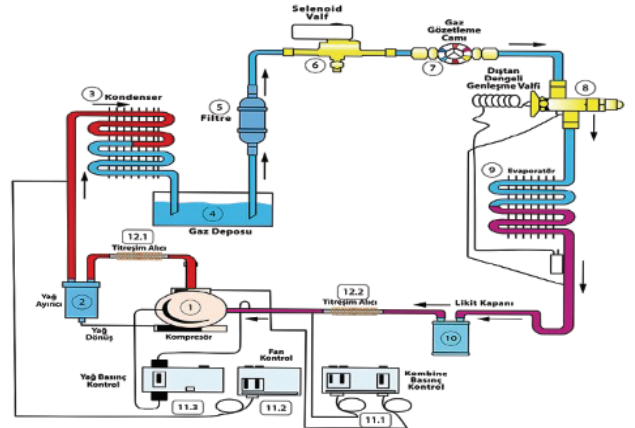

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	0/+45	0/+50	-10/+45	-10/+50	0/+45	0/+50	-10/+45	-10/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	28.34	25.54	19.08	17.13	27.31	25.13	17.85	16.35
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	9.65	10.23	8.30	8.66	8.73	9.32	7.51	7.84
COP / COP (w/w)	2.94	2.50	2.30	1.98	3.13	2.70	2.38	2.08