
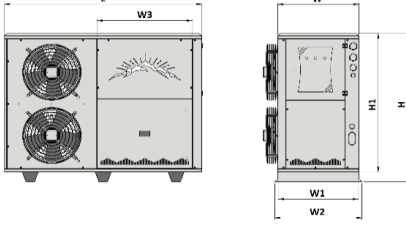


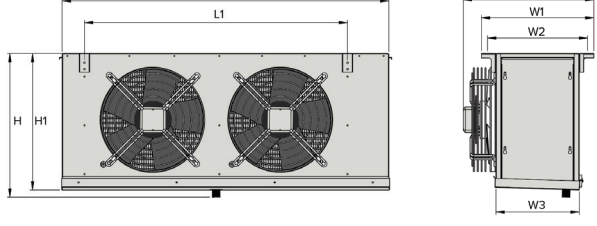

DIŞ ÜNİTE (KONDENSER) ÖLÇÜLERİ / OUTDOOR UNIT (CONDENSER) DIMENSIONS								İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLERİ / INDOOR UNIT (EVAPORATOR) DIMENSIONS							
L	L1	H	H1	W	W1	W2	W3	L	L1	H	H1	W	W1	W2	W3
1700	0	1333	1247	700	690	750	823	1850	1530	871	808	621	555	492	441


DIŞ ÜNİTE / OUTDOOR UNIT = 360 KG	İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm = 90 KG
-----------------------------------	--

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	EWEREST 10-44	MARKA / BRAND	FRASCOLD	MODEL / MODEL	TEA50 125 6 T2
ADET / QUANTITY	1	MODEL / MODEL	S12-42Y	ADET / QUANTITY	1
FAN ADET / NUMBER OF FANS	2	GÜÇ / POWER	12 HP	FAN ADET / NUMBER OF FANS	2
FAN ÇAPI / FAN DIAMETER (mm)	500	TİPİ / TYPE	YARI HERMETİK	FAN ÇAPI / FAN DIAMETER (mm)	500
KAPASİTE / CAPACITY (kW)	44	NOMİNAL AKIM / NOMINAL CURRENT		KAPASİTE / CAPACITY (kW)	19.20
YÜZEY ALANI / SURFACE AREA (m ²)	135	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m ²)	5/8-1 3/8	YÜZEY ALANI / SURFACE AREA (m ²)	62.69

ÜRÜN / PRODUCT	ECO	PLS
GAZ DEPOSU / GAS RECEIVER	✓	✓
YAĞ AYIRICI / OIL SEPARATOR	✗	✗
LİKİT TUTUCU / LIQUID RECEIVER	✗	✗
MANOMETRE / PRESSURE GAUGE	✗	✓
Y.B. SWITCHİ / HIGH PRESSURE SWITCH	✓	✗
KOMBİNE / COMBINATION UNIT	✗	✓
GÖZELTME CAMI / SIGHT GLASS	✓	✓
SELENOİD / SOLENOID VALVE	✗	✓
TİTREŞİM / VIBRATION ISOLATOR	✓	✓
DRAYER / DRYER	✓	✓
DİJİTAL / DIGITAL	✓	✓
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓
KAPİLER / CAPILLARY TUBE	✗	✓

AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR.
THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.

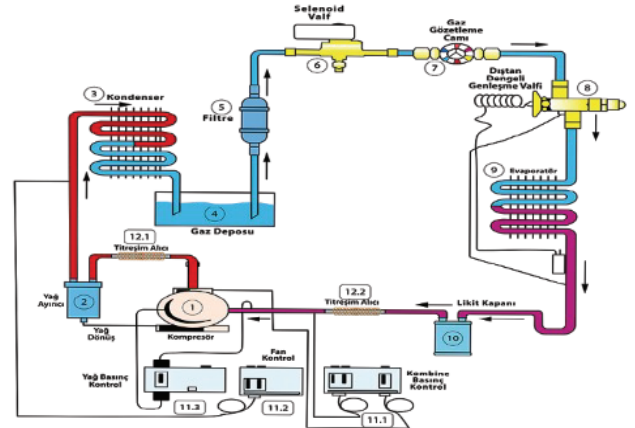

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	0/+45	0/+50	-10/+45	-10/+50	0/+45	0/+50	-10/+45	-10/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	29.61	26.66	19.75	17.62	30.66	28.13	19.72	17.97
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	10.35	10.90	8.71	9.01	9.36	9.94	8.11	8.47
COP / COP (w/w)	2.86	2.45	2.27	1.96	3.27	2.83	2.43	2.12