



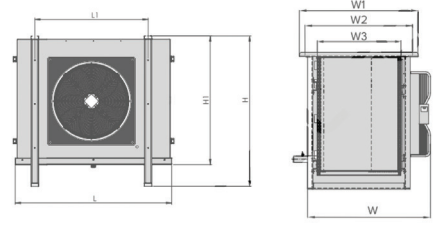

DIŞ ÜNİTE (KONDENSER) ÖLÇÜLERİ / OUTDOOR UNIT (CONDENSER) DIMENSIONS								İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLERİ / INDOOR UNIT (EVAPORATOR) DIMENSIONS							
L	L1	H	H1	W	W1	W2	W3	L	L1	H	H1	W	W1	W2	W3
1399	0	1327	1260	598	624	664	644	1402	1030	1335	1164	1049	1014	954	745



DIŞ ÜNİTE / OUTDOOR UNIT = 297 KG


İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm = 160 KG

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	SNKHBX 41-29	MARKA / BRAND	FRASCOLD	MODEL / MODEL	TFF63 118 10
ADET / QUANTITY	1	MODEL / MODEL	2V 10 42-29 Y	ADET / QUANTITY	1
FAN ADET / NUMBER OF FANS	2	GÜÇ / POWER	10 HP	FAN ADET / NUMBER OF FANS	1
FAN ÇAPI / FAN DIAMETER (mm)	500	TİPİ / TYPE	ÇİFT KADEME	FAN ÇAPI / FAN DIAMETER (mm)	630
KAPASİTE / CAPACITY (kW)	41	NOMİNAL AKIM / NOMINAL CURRENT		KAPASİTE / CAPACITY (kW)	9.80
YÜZEY ALANI / SURFACE AREA (m ²)	108	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m ²)	5/8-1 3/8	YÜZEY ALANI / SURFACE AREA (m ²)	79,56

ÜRÜN / PRODUCT	ECO	PLS
GAZ DEPOSU / GAS RECEIVER	✓	✓
YAĞ AYIRICI / OIL SEPARATOR	✓	✓
LİKİT TUTUCU / LIQUID RECEIVER	✓	✓
MANOMETRE / PRESSURE GAUGE	✗	✓
Y.B. SWITCHİ / HIGH PRESSURE SWITCH	✓	✗
KOMBİNE / COMBINATION UNIT	✗	✓
GÖZELTME CAMI / SIGHT GLASS	✓	✓
SELENOİD / SOLENOID VALVE	✗	✓
TİTREŞİM / VIBRATION ISOLATOR	✓	✓
DRAYER / DRYER	✓	✓
DİJİTAL / DIGITAL	✓	✓
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓
KAPİLER / CAPILLARY TUBE	✗	✓

AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR.
THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.

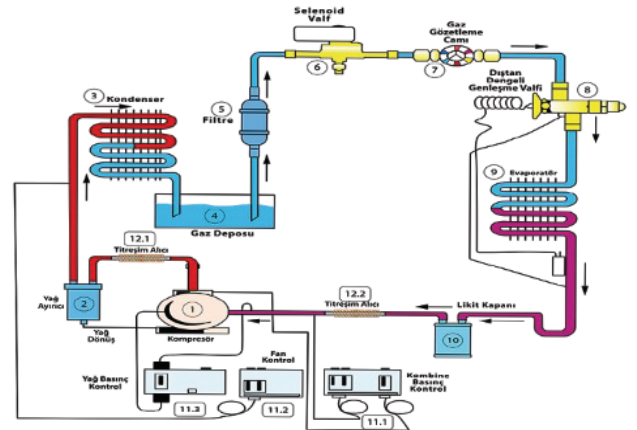

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	-40/+40	-40/+50	-45/+40	-45/+50	-40/+40	-40/+50	-45/+40	-45/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	10.23	9.93	8.38	8.17	7.72	7.49	5.99	5.78
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	8.28	9.40	7.34	8.27	6.25	7.28	5.47	6.42
COP / COP (w/w)	1.23	1.06	1.14	0.99	1.24	1.03	1.10	0.90