




DIŞ ÜNİTE (KONDENSER) ÖLÇÜLER / OUTDOOR UNIT (CONDENSER) DIMENSIONS


L	L1	H	H1	W	W1	W2	W3
1450	0	1259	1231	500	521	535	751

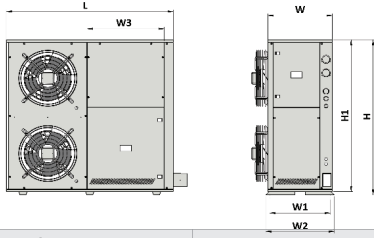

DIŞ ÜNİTE / OUTDOOR UNIT = 276 kg

İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLER / INDOOR UNIT (EVAPORATOR) DIMENSIONS

L	L1	H	H1	W	W1	W2	W3
1650	1330	791	728	616	555	492	441

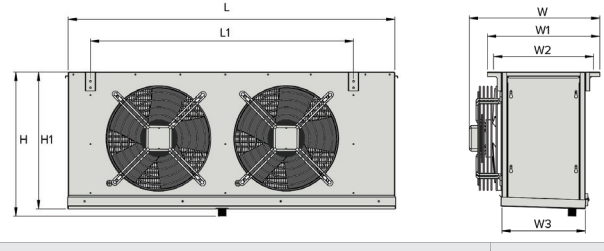


İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm = 90 kg

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	SNOWBOX 9-8	MARKA / BRAND	FRASCOLD	MODEL / MODEL	TEA45 126 8
ADET / QUANTITY	1	MODEL / MODEL	S8-42.Y	ADET / QUANTITY	1
FAN ADET / NUMBER OF FANS	2	GÜÇ / POWER	8 HP	FAN ADET / NUMBER OF FANS	2
FAN ÇAPI / FAN DIAMETER (mm)	500	TİPİ / TYPE	YARI HERMETİK	FAN ÇAPI / FAN DIAMETER (mm)	450
KAPASİTE / CAPACITY (kW)	30	NOMİNAL AKIM / NOMINAL CURRENT		KAPASİTE / CAPACITY (kW)	10.09
YÜZEY ALANI / SURFACE AREA (m²)	70	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m²)	5/8-1 3/8	YÜZEY ALANI / SURFACE AREA (m²)	44.7

ÜRÜN / PRODUCT	ECO	PLS
GAZ DEPOSU / GAS RECEIVER	✓	✓
YAĞ AYIRICI / OIL SEPARATOR	✓	✓
LİKİT TUTUCU / LIQUID RECEIVER	✓	✓
MANOMETRE / PRESSURE GAUGE	✗	✓
Y.B. SWITCHİ / HIGH PRESSURE SWITCH	✓	✗
KOMBİNE / COMBINATION UNIT	✗	✓
GÖZELTME CAMI / SIGHT GLASS	✓	✓
SELENOİD / SOLENOID VALVE	✗	✓
TİTREŞİM / VIBRATION ISOLATOR	✓	✓
DRAYER / DRYER	✓	✓
DİJİTAL / DIGITAL	✓	✓
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓
KAPİLER / CAPILLARY TUBE	✗	✓

AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR.
THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.

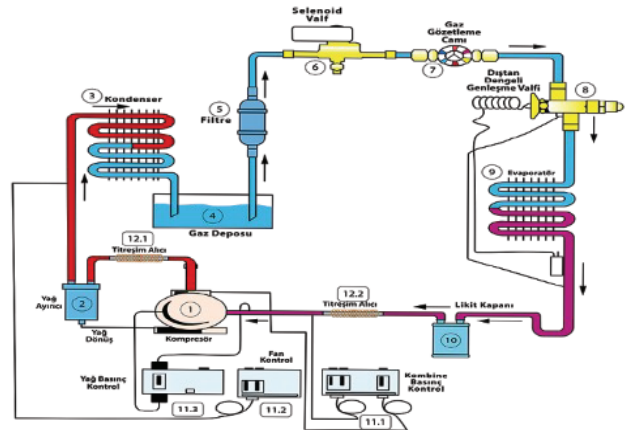

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	-25/+45	-25/+50	-31/+45	-31/+50	-25/+45	-25/+50	-31/+45	-31/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	10.82	9.55	----	----	9.09	8.10	----	----
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	6.75	6.83	----	----	5.44	5.45	----	----
COP / COP (w/w)	1.60	1.40	----	----	1.67	1.49	----	----