



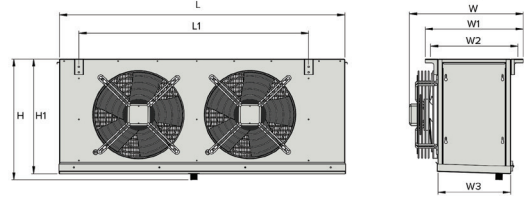

DIŞ ÜNİTE (KONDENSER) ÖLÇÜLERİ / OUTDOOR UNIT (CONDENSER) DIMENSIONS								İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLERİ / INDOOR UNIT (EVAPORATOR) DIMENSIONS							
L	L1	H	H1	W	W1	W2	W3	L	L1	H	H1	W	W1	W2	W3
1300	0	1259	1231	500	510	535	599	1850	1530	868	805	546	480	417	366




DIŞ ÜNİTE / OUTDOOR UNIT	= 125 KG	İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm	= 60 KG
--------------------------	----------	--	---------

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	SNOW BOX 800	MARKA / BRAND	COPELAND	MODEL / MODEL	TEA50 123 6 T2
ADET / QUANTITY	1	MODEL / MODEL	ZB48 CKE TFD 591	ADET / QUANTITY	1
FAN ADET / NUMBER OF FANS	2	GÜÇ / POWER	6.5 HP	FAN ADET / NUMBER OF FANS	2
FAN ÇAP / FAN DIAMETER (mm)	500	TİPİ / TYPE	HERMETİK	FAN ÇAP / FAN DIAMETER (mm)	500
KAPASİTE / CAPACITY (kW)	30	NOMİNAL AKIM / NOMINAL CURRENT		KAPASİTE / CAPACITY (kW)	10.88
YÜZEY ALANI / SURFACE AREA (m ²)	70	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m ²)	1/2-7/8	YÜZEY ALANI / SURFACE AREA (m ²)	36,89

ÜRÜN / PRODUCT	ECO	PLS	AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR. THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.
GAZ DEPOSU / GAS RECEIVER	✓	✓	
YAĞ AYIRICI / OIL SEPARATOR	✗	✗	
LİKİT TUTUCU / LIQUID RECEIVER	✗	✗	
MANOMETRE / PRESSURE GAUGE	✗	✓	
Y.B. SWİTÇİ / HIGH PRESSURE SWITCH	✓	✗	
KOMBİNE / COMBINATION UNIT	✗	✓	
GÖZELTME CAMI / SIGHT GLASS	✓	✓	
SELENOİD / SOLENOID VALVE	✗	✓	
TİTREŞİM / VIBRATION ISOLATOR	✓	✓	
DRAYER / DRYER	✓	✓	
DİJİTAL / DIGITAL	✓	✓	
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓	
KAPİLER / CAPILLARY TUBE	✗	✓	

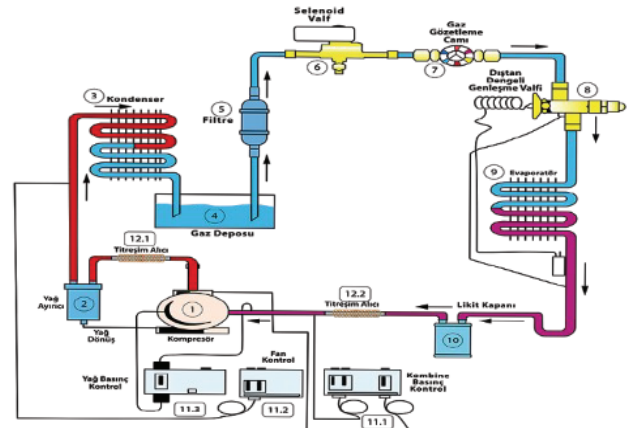

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	0/+45	0/+50	-10/+45	-10/+50	0/+45	0/+50	-10/+45	-10/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	18.05	16.55	12.20	11.10	18.45	17.25	12.30	11.40
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	5.48	6.16	5.54	6.23	5.37	6.02	5.35	6.01
COP / COP (w/w)	3.30	2.69	2.21	1.78	3.44	2.87	2.30	1.90