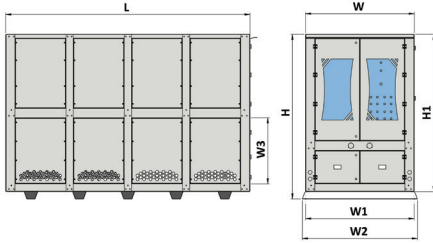
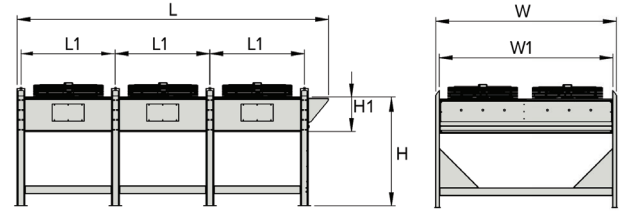



DIŞ ÜNİTE (KABİN) ÖLÇÜLER / OUTDOOR UNIT (CABIN) DIMENSIONS

H	H1	L	L1	W	W1	W2	W3
1919	1829	3011	----	1200	1198	1278	2270


KONDENSER ÖLÇÜLER / CONDENSER DIMENSIONS

H	W	L	W1	H1	W1
1.355	2.484	3.878	2.384	565	1.202


DIŞ ÜNİTE (KABİN) / OUTDOOR UNIT (CABIN)
DIŞ ÜNİTE : = 2195 kg
CONDENSER
KONDENSER : = 1270 KG
KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR	
MARKA / BRAND	TUD80 234 2.1	MARKA / BRAND	FRASCOLD
ADET / QUANTITY	1	MODEL / MODEL	Z30-126 Y X 4
FAN ADET / NUMBER OF FANS	6	GÜÇ / POWER	120 HP
FAN ÇAPI / FAN DIAMETER (mm)	800	TİPİ / TYPE	YARI HERMETİK
KAPASİTE / CAPACITY (kW)	299.862	NOMİNAL AKIM / NOMINAL CURRENT	-----
YÜZEY ALANI / SURFACE AREA (m²)	743,13	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m²)	2x 1 1/8 - 2x 3 1/8

ÜRÜN / PRODUCT	ECO	PLS	AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR. THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.
GAZ DEPOSU / GAS RECEIVER	✓	✓	
YAĞ AYIRICI / OIL SEPARATOR	✗	✗	
LİKİT TUTUCU / LIQUID RECEIVER	✗	✗	
MANOMETRE / PRESSURE GAUGE	✗	✓	
Y.B. SWITCHİ / HIGH PRESSURE SWITCH	✓	✗	
KOMBİNE / COMBINATION UNIT	✗	✓	
GÖZELTME CAMI / SIGHT GLASS	✓	✓	
SELENOİD / SOLENOID VALVE	✗	✓	
TİTREŞİM / VIBRATION ISOLATOR	✓	✓	
DRAYER / DRYER	✓	✓	
DİJİTAL / DIGITAL	✓	✓	
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓	
KAPİLER / CAPILLARY TUBE	✗	✓	

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	-25/+45	-25/+50	-31/+45	-31/+50	-25/+45	-25/+50	-31/+45	-31/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	123.40	109.12	----	----	127.60	116.68	----	----
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	79.00	80.80	----	----	70.80	72.80	----	----
COP / COP (w/w)	1.56	1.35	----	----	1.80	1.60	----	----