



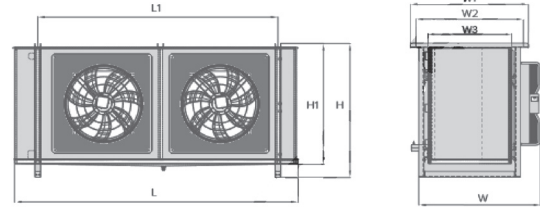

DIŞ ÜNİTE (KONDENSER) ÖLÇÜLERİ / OUTDOOR UNIT (CONDENSER) DIMENSIONS								İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLERİ / INDOOR UNIT (EVAPORATOR) DIMENSIONS							
L	L1	H	H1	W	W1	W2	W3	L	L1	H	H1	W	W1	W2	W3
2150	0	1688	1601	900	898	958	748	2431	2030	1335	1160	950	915	855	646

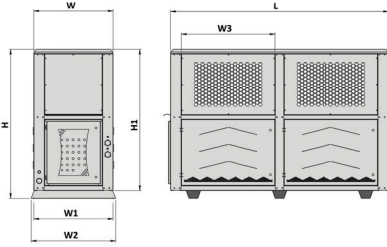

DIŞ ÜNİTE / OUTDOOR UNIT = 540 KG


İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm = 486 KG

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	VL 56	MARKA / BRAND	BİTZER	MODEL / MODEL	TFF63 126 10
ADET / QUANTITY	1	MODEL / MODEL	S6J-16.2Y/LS	ADET / QUANTITY	1
FAN ADET / NUMBER OF FANS	2	GÜÇ / POWER	16 HP	FAN ADET / NUMBER OF FANS	2
FAN ÇAPI / FAN DIAMETER (mm)	630	TİPİ / TYPE	ÇİFT KADEME	FAN ÇAPI / FAN DIAMETER (mm)	630
KAPASİTE / CAPACITY (kW)	73	NOMİNAL AKIM / NOMINAL CURRENT	-----	KAPASİTE / CAPACITY (kW)	15.50
YÜZEY ALANI / SURFACE AREA (m ²)	149	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m ²)	5/8- 1 5/8	YÜZEY ALANI / SURFACE AREA (m ²)	118,94

ÜRÜN / PRODUCT	ECO	PLS
GAZ DEPOSU / GAS RECEIVER	✓	✓
YAĞ AYIRICI / OIL SEPARATOR	✓	✓
LİKİT TUTUCU / LIQUID RECEIVER	✓	✓
MANOMETRE / PRESSURE GAUGE	✗	✓
Y.B. SWITCHİ / HIGH PRESSURE SWITCH	✓	✗
KOMBİNE / COMBINATION UNIT	✗	✓
GÖZELTME CAMI / SIGHT GLASS	✓	✓
SELENOİD / SOLENOID VALVE	✗	✓
TİTREŞİM / VIBRATION ISOLATOR	✓	✓
DRAYER / DRYER	✓	✓
DİJİTAL / DIGITAL	✓	✓
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓
KAPİLER / CAPILLARY TUBE	✗	✓

AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR.
THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.

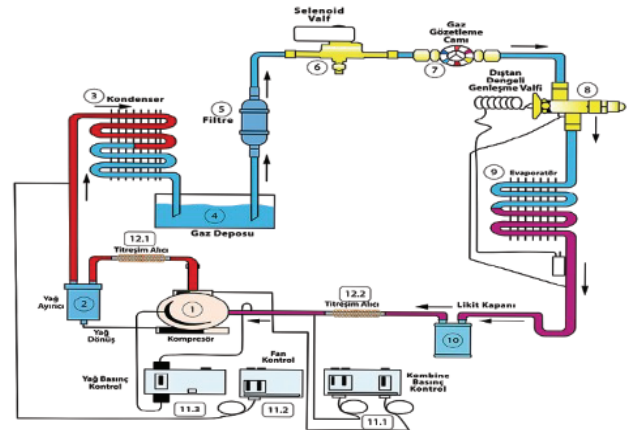

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	-40/+40	-40/+50	-45/+40	-45/+50	-40/+40	-40/+50	-45/+40	-45/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	16.10	15.43	13.17	12.66	12.36	11.44	9.50	8.68
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	11.90	13.20	10.63	11.78	11.00	12.93	9.95	11.73
COP / COP (w/w)	1.35	1.17	1.24	1.07	1.12	0.88	0.96	0.74