



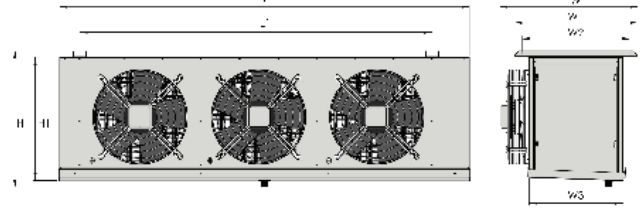

DIŞ ÜNİTE (KONDENSER) ÖLÇÜLERİ / OUTDOOR UNIT (CONDENSER) DIMENSIONS								İÇ ÜNİTE (EVAPARATÖR) ÖLÇÜLERİ / INDOOR UNIT (EVAPORATOR) DIMENSIONS							
L	L1	H	H1	W	W1	W2	W3	L	L1	H	H1	W	W1	W2	W3
2180	-----	1349	1262	800	783	844	876	2600	2280	871	808	621	555	492	441

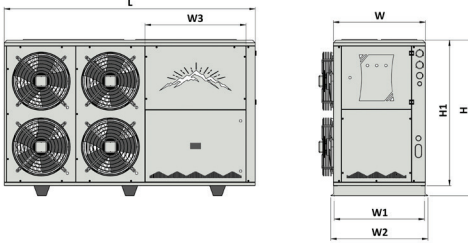

DIŞ ÜNİTE / OUTDOOR UNIT = 416 KG


İÇ ÜNİTENİN DRENAJ / INDOOR UNIT DRAIN Ø = 33 mm = 125 KG

KOMPRESÖR-KONDENSER-EVAPARATÖR BİLGİLERİ / COMPRESSOR - CONDENSER - EVAPORATOR INFORMATION

DIŞ ÜNİTE (KONDENSER)		KOMPRESÖR / COMPRESSOR		İÇ ÜNİTE (EVAPARATÖR)	
MARKA / BRAND	EWEREST 10-63	MARKA / BRAND	BİTZER	MODEL / MODEL	TEA50 135 6 T2
ADET / QUANTITY	1	MODEL / MODEL	4NES-20Y	ADET / QUANTITY	1
FAN ADET / NUMBER OF FANS	4	GÜÇ / POWER	20 HP	FAN ADET / NUMBER OF FANS	3
FAN ÇAPI / FAN DIAMETER (mm)	500	TİPİ / TYPE	YARI HERMETİK	FAN ÇAPI / FAN DIAMETER (mm)	500
KAPASİTE / CAPACITY (kW)	63	NOMİNAL AKIM / NOMINAL CURRENT	-----	KAPASİTE / CAPACITY (kW)	28.49
YÜZEY ALANI / SURFACE AREA (m²)	153	BAĞLANTI ÖLÇÜLERİ / CONNECTION DIMENSIONS (m²)	7/8-1 5/8	YÜZEY ALANI / SURFACE AREA (m²)	93,85

ÜRÜN / PRODUCT	ECO	PLS
GAZ DEPOSU / GAS RECEIVER	✓	✓
YAĞ AYIRICI / OIL SEPARATOR	✗	✗
LİKİT TUTUCU / LIQUID RECEIVER	✗	✗
MANOMETRE / PRESSURE GAUGE	✗	✓
Y.B. SWİTÇİ / HIGH PRESSURE SWITCH	✓	✗
KOMBİNE / COMBINATION UNIT	✗	✓
GÖZELTME CAMI / SIGHT GLASS	✓	✓
SELENOİD / SOLENOID VALVE	✗	✓
TİTREŞİM / VIBRATION ISOLATOR	✓	✓
DRAYER / DRYER	✓	✓
DİJİTAL / DIGITAL	✓	✓
ELEKTRİK PANOSU / ELECTRICAL PANEL	✓	✓
KAPİLER / CAPILLARY TUBE	✗	✓

AKIŞ DİYAGRAMI TEMSİLİ GÖRSEL OLARAK KOYULMUŞTUR.
THE FLOW DIAGRAM HAS BEEN PRESENTED AS A REPRESENTATIVE VISUAL.

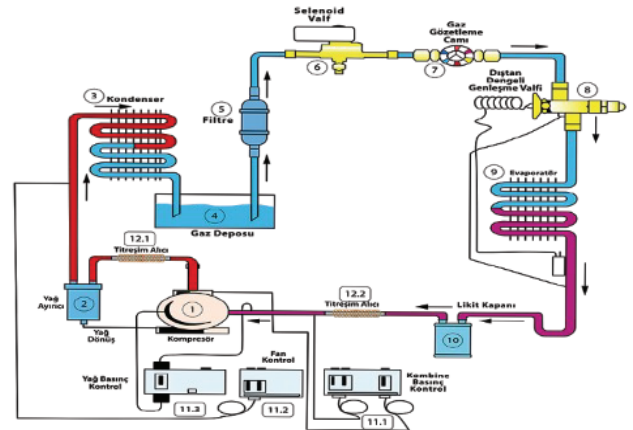

KOMPRESÖR KAPASİTESİ COMPRESSOR CAPACITY	R 404 A				R 449 A			
TO / TC / TO / TC (°C)	0/+45	0/+50	-10/+45	-10/+50	0/+45	0/+50	-10/+45	-10/+50
SOĞUTMA KAP. / COOLING CAPACITY (kW)	43.00	38.70	28.60	25.60	42.10	38.60	27.10	24.70
ÇEKİLEN GÜÇ / POWER CONSUMPTION (kW)	14.32	15.16	12.20	12.72	12.62	13.35	10.82	11.23
COP / COP (w/w)	3.00	2.55	2.34	2.01	3.33	2.89	2.51	2.20